

# Amusement Lashing Cord



**INCOR**

Lashing Cord is used to bind rope ends, bind nets and rope together as well as to lash nets and rope to railings and uprights.

The choice of lashing cord size, construction and color is dependent on the desired look and strength of the finished project.



Description	#36 Black TW36BPYBK	#36 Sand TW36BPYSD	#84 Sand TW84PYSD	1/8" Black RPYB013BK	1/4" Black RPYB025BK
Cord Diameter	0.086 (2.2 mm)	0.086 (2.2 mm)	0.134 (3.4 mm)	0.125 (3.2 mm)	0.25" (6.3 mm)
Fiber	Polyester	Polyester	Polyester	Polyester	Polyester
Construction	Hollow Braid <sup>1</sup>	Hollow Braid <sup>1</sup>	3 Strand Twisted <sup>2</sup>	Diamond Braid <sup>3</sup>	Diamond Braid <sup>3</sup>
Breaking Strength	350 lb (159 kg)	350 lb (159 kg)	760 lb (345 kg)	720 lb (327 kg)	1060 lb (480 kg)
Spool Length	936 ft (285 m)	936 ft (285 m)	1025 ft (312 m)	1025 ft (312 m)	1000 ft (305 m)
Typical Use	M1250, N815, P820K, P360K			CCRN, N815, N820H	

<sup>1</sup>Hollow diamond braided polyester is woven around an open core which provides greater flexibility for small diameter lashing cord.

<sup>2</sup>Three strand twisted cord has the natural look and feel of rope. It has greater strength than braided cord of similar size.

<sup>3</sup>Diamond braided polyester is woven around a flexible core. It holds knots better than a solid braided type and ties easily.



InCord's netting and rope products help to create nautical, rustic and natural themes while keeping visitors safe.

InCord offers on-site installation.

*When we say custom – we mean netting systems designed specifically to meet your requirements.*



The process of lashing is made from one mesh to the next, terminated at each corner. The technique may be varied depending on the border or frame the net is being lashed to.

A border rope can be woven through the mesh opening of the net, usually diamond mesh. Netting without sewn borders typical of square mesh would be lashed directly to the border rope with loose netting strands tucked under the lashing.

Lashing cord is usually matched in color to the border rope.



ProManila navy lashed with #84 Polyester twine



5/8" 3- strand Polyester rope, Netting; N815, DNR800




1.25" ProManila lashed to M1250 with #36 Polyester twine



1.25" ProManila woven through P360K



1.25" ProManila lashed to P820K with #36 Polyester twine

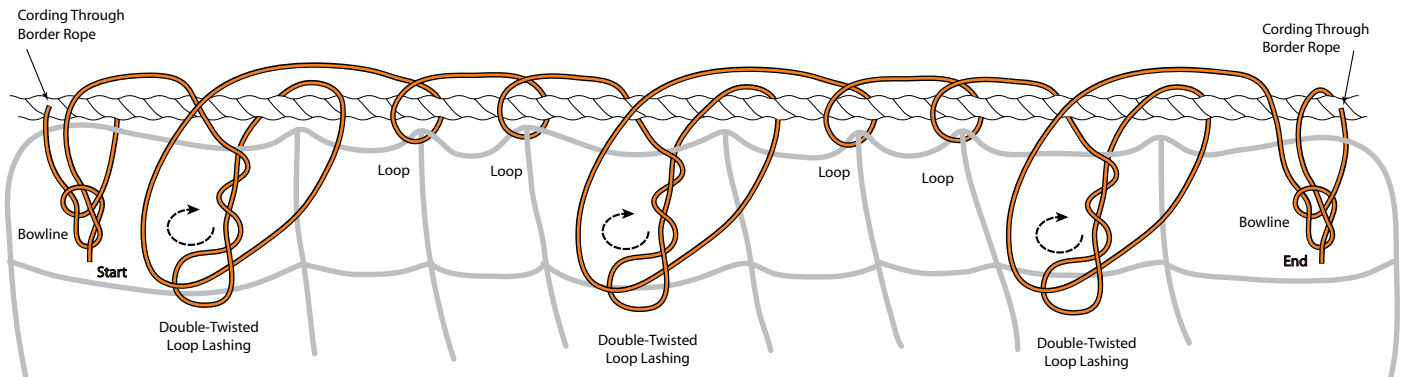

## Custom Safety Netting Solutions



**INCORD**

226 Upton Road  
Colchester, CT 06415  
Phone: 860-537-1414 • Fax: 860-537-7393  
incord.com • netting@incord.com

**1-800-596-1066**

