









NEXUS WEBNETS™


Webbing materials & specifications

Nexus WebNets™ can be produced with a variety of in-stock webbing from one inch to two inch widths. Standard webbing is available in polyester, nylon and polypropylene. Consult your sales representative for the right material choice for your application.

Polyester

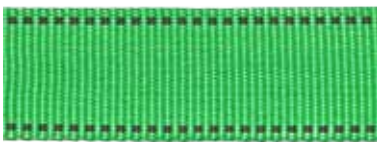

Polyester webbing is a heavier material that won't stretch and is a premium choice for strength with the highest resistance to chemical, moisture and UV exposure.

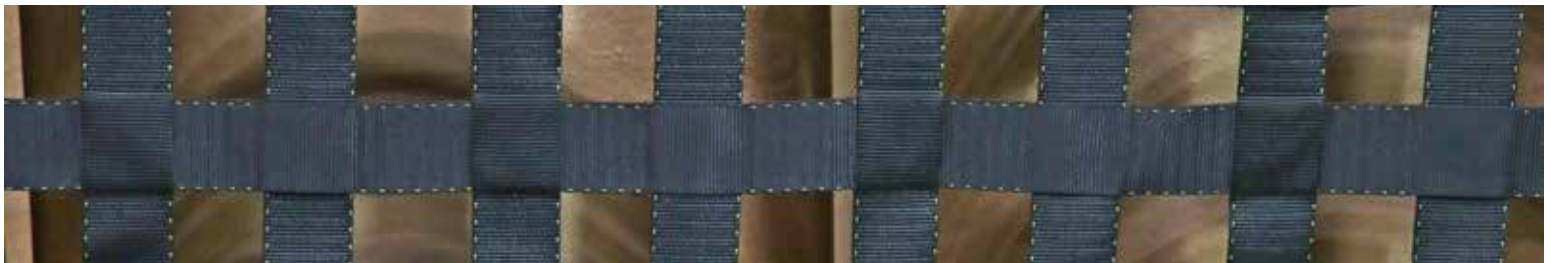Size	Color	Tensile Strength	Thickness	
1 inch	Black	730 lb	0.045 inch	
1 inch HD	Black	4,500 lb	0.065 inch	
1 inch	Orange	6,000 lb	0.1 inch	
1 inch	Light Blue	4,500 lb	0.075 inch	
1-1/2 inch	Green	6,000 lb	0.077 inch	
2 inch	Black	6,000 lb	0.05 inch	





Nylon


Nylon webbing has high elongation properties for enhanced impact absorption, and is used where resistance to chemicals, moisture and UV are not crucial.

Size	Color	Tensile Strength	Thickness	
1-3/4 inch <i>Slotted</i>	Black	6,000 lb	0.075 inch	
2 inch	Black	4,500 lb	0.065 inch	

Polypropylene

Polypropylene webbing features the lowest weight of all InCord webbing materials, while maintaining high resistance to chemicals, moisture and UV.

Size	Color	Tensile Strength	Thickness	
2 inch	Black	1,600 lb	0.06 inch	
2 inch	Red	1,600 lb	0.06 inch	

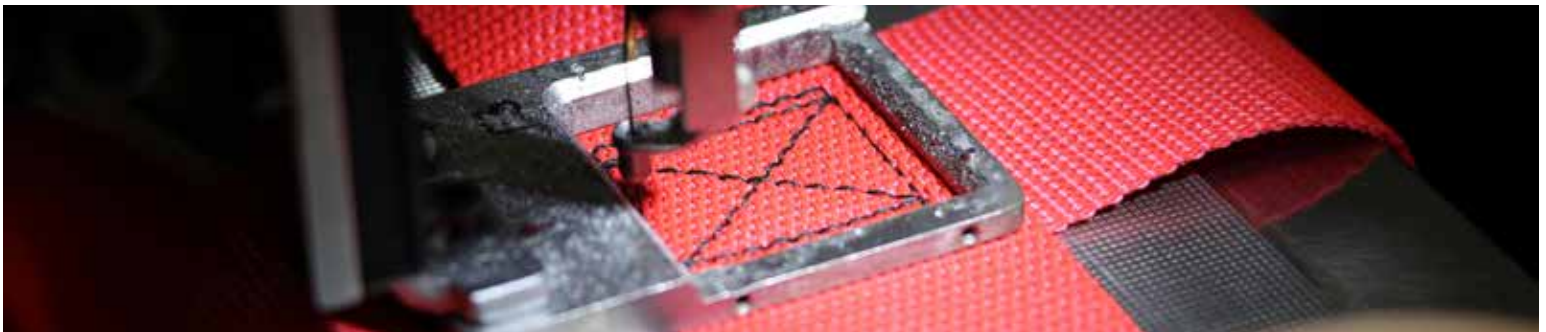

INCORD

InCord
226 Upton Road
Colchester, CT 06415
860.537.1414
incord.com



Proud Member



InCord is an ISO 9001 registered company.