



Nexus WebNets™

Crafted at the convergence of material, design, technology, and skill.



NEXUS WEBNETS

Nexus WebNets from InCord provide a custom, high-tension netting solution, applicable wherever minimal deflection is required. From heavy duty rack and conveyor protection to complicated load stabilization, precision Nexus WebNets can be custom crafted for your exact need.


More Materials, More Solutions

InCord carries several webbing types for Nexus WebNets to provide the ideal material for your application and load requirement.

Advanced Design and Production

Nexus WebNets are built to strict tolerances with computer-aided design and fabrication for accurate and repeatable results, even on large quantity orders.

- Custom mesh sizes including fractional increments
- State of the art fabrication for high quality and short lead times
- Numerous hardware options to suit your application

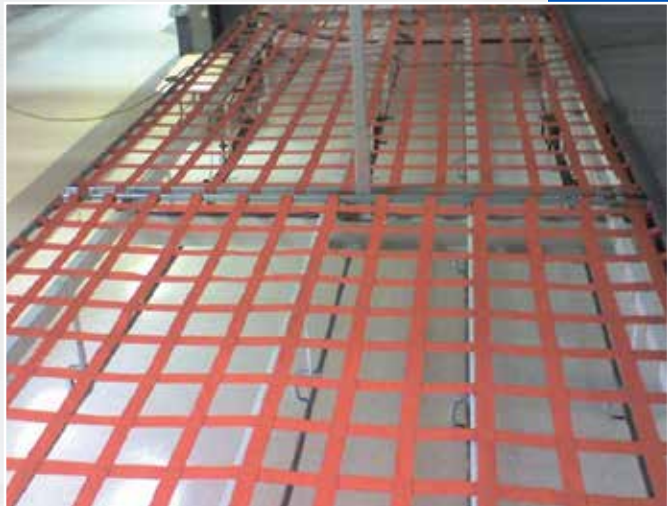

Authorized
Distributors
Nationwide

Custom-made
in the USA

Ideal for:

- **Rack Guarding** - Vertical and Horizontal
- **Conveyor Guarding** - Heavy-duty overhead protection
- **Truck Load Stabilization** - Prevent cargo movement in transit

Slotted Webbing

InCord can also provide 1-3/4" nylon web nets in a slotted web configuration in 4" OC and 8" OC mesh sizes, eliminating the need for stitching at each intersection to reduce both lead time and expense.

Nexus Fusion™ No-Stitch WebNet

This innovative web net of 1" polyester, features fiber-interwoven and fused intersections. Cut and finished to order, Nexus Fusion is an optimal solution when a short lead time is critical, or if reduced overall net weight is required. Available in 8" OC mesh size.




Custom fabrication with quick turnaround.

Webbing Materials & Specifications

Nexus WebNets™ can be produced with a variety of in-stock webbing from one inch to two inch widths. Standard webbing is available in polyester, nylon and polypropylene.

Size	Fiber	Thickness	Tensile Strength	Color(s)
1 inch	Polyester	0.045 inch	730 lbs	Black
1-1/2 inch	Polyester	0.077 inch	6,000 lbs	Green
2 inch	Polyester	0.05 inch	6,000 lbs	Black
1-3/4 inch	Nylon (slotted)	0.075 inch	6,000 lbs	Black
2 inch	Nylon	0.05 inch	6,000 lbs	Black
2 inch	Polypropylene	0.06 inch	1,600 lbs	Black, Red

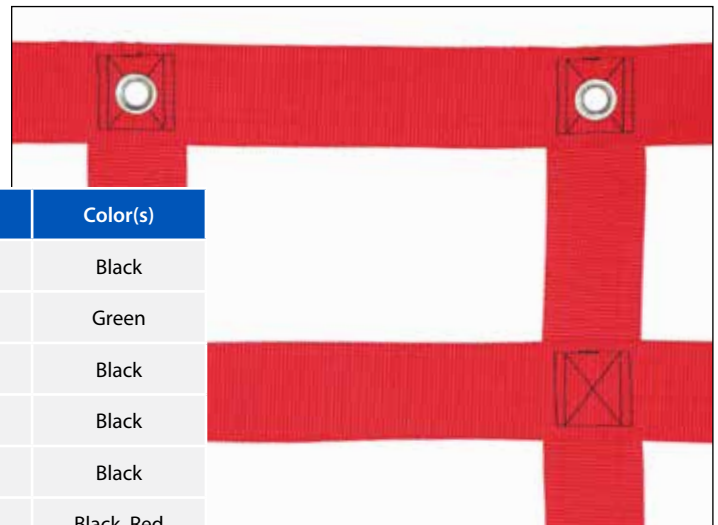

Hardware Options for any Application

A diverse array of net terminations, including web loops, grommets, snap hooks, steel rings, cam buckles and more, are available to complete your custom Nexus WebNets and ensure the right fit and fastening system for your unique application.

These are some of our most popular attachment options:



D-Ring
1-1/4 inch
Nickel Plated Steel

Swivel Snap Hook
3-1/4 inch (1-1/16 inch ID)
Stainless Steel

Cam Buckle
1 inch, 2 inch
Galvanized Steel



Snap Hook
120 mm, 80 mm
Zinc Plated Steel

Grommet
7/16 inch ID
Stainless Steel

Ring
2-1/2 inch, 3 inch
Zinc Plated Steel



InCord
226 Upton Road
Colchester, CT 06415
860.537.1414
incord.com

INCORD



InCord is an ISO 9001 registered company.

CAGE Code No. 1NPR7