



# Residential Safety Nets

Interior fall protection nets for residential construction.



**INCOR**

Residential Safety Net (RSN) systems from InCord provide interior fall protection for wood frame structures. Installed right after plumb and line, RSNs boost site safety and confidence at a phase when fall danger is at its greatest. Be OSHA compliant and enable multiple trades to work simultaneously without having to set up heavy interior scaffolding.

A safety plan including InCord RSNs and other netting products can lower your insurance costs and give your company a safety rating that will keep you competitive.

### **Meets OSHA 1926.501(b)(13)**

Providing a safe working environment isn't just a good idea, it's the law. When used properly, InCord RSN systems comply with OSHA 1926.501(b)(13) that in residential construction, employers must provide fall protection for crew working at six feet or higher.

### **Reusable and Adaptable**

RSNs from InCord come down as easily as they go up for transport to the next jobsite where they may be used again.

Every structure is unique, and InCord RSNs are ready to adapt. Just one Residential Safety Net is adjustable on-site to up to twenty five sizes. Inside-woven border ropes allow the installer to take in excess netting in one foot increments to size the system to various structure dimensions.



- Easy 30-90 minute installation per house.
- Reusable and easily relocatable
- One net can adjust to up to 25 dimensions
- Safety orange for high visibility
- Custom made in the USA

Meets OSHA requirements for Residential Safety 1926.501(b)(13)





# Setting a New Standard for Residential Construction Safety Net Systems

## HTPP Knotless Netting for Low Deflection

Unlike nylon, the fiber of InCord's M3000 High Tenacity Polypropylene Knotless Netting doesn't stretch, lessening the system's deflection when clearance is limited. A properly installed RSN system can safely and repeatedly arrest a fall within about four feet.



M3000  
4 inch



Model	Style	Fiber	Mesh Size	Cord Diameter
M3000	Raschel Knotless Netting	High Tenacity Polypropylene	4 in (100 mm)	3/16 in (4.75 mm)


## Fast and Secure Web Strap Installation

InCord's RSN systems install from 5,000 pound perimeter ropes to the top plate with 1-inch web straps. The integrated no-slip cam buckle allows for easy cinching and gradual tensioning of the net, as opposed to pulling the entire net under tension to fixed anchor points.



## Up to Twenty-Five Net Sizes in One

The tables below list all of the possible dimensions for our five standard net sizes. We also offer custom sizes and configurations to suit your requirements. Ask your InCord distributor to learn more.

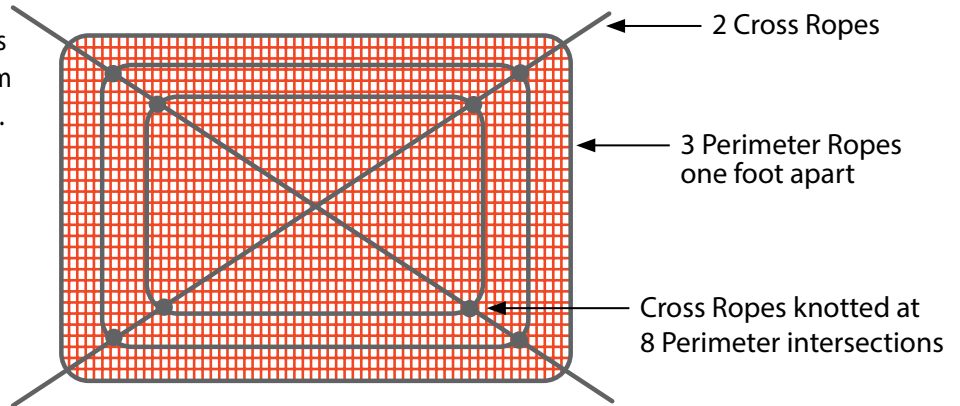

17x22 (XxY)	13x18	13x19	13x20	13x21	13x22
	14x18	14x19	14x20	14x21	14x22
	15x18	15x19	15x20	15x21	15x22
	16x18	16x19	16x20	16x21	16x22
	17x18	17x19	17x20	17x21	17x22

17x27 (XxY)	13x23	13x24	13x25	13x26	13x27
	14x23	14x24	14x25	14x26	14x27
	15x23	15x24	15x25	15x26	15x27
	16x23	16x24	16x25	16x26	16x27
	17x23	17x24	17x25	17x26	17x27

22x27 (XxY)	18x23	18x24	18x25	18x26	18x27
	19x23	19x24	19x25	19x26	19x27
	20x23	20x24	20x25	20x26	20x27
	21x23	21x24	21x25	21x26	20x27
	22x23	22x24	22x25	22x26	20x27

22x22 (XxY)	18x18	18x19	18x20	18x21	18x22
	19x19	19x20	19x21	19x22	
	20x20	20x21	20x22		
	21x21	21x22	22x22		

27x27 (XxY)	23x23	23x24	23x25	23x26	23x27
	24x24	24x25	24x26	24x27	
	24x25	25x26	25x27		
	24x26	26x27	27x27		



InCord  
226 Upton Road  
Colchester, CT 06415  
860.537.1414  
incord.com



InCord is an ISO 9001 registered company.  
CAGE Code No. 1NPR7